
C7009EXT

hotbath
italian bathroomware


Trim parts for thermostatic mixer with 2-way diverter
Parti esterne per miscelatore termostatico con deviatore a 2 vie
Parties extérieures pour mitigeur thermostatique avec inverseur 2 voies
Partes exteriores para termostático con inversor de 2 vías
AP-Teile für Thermostatbatterie mit 2-Wege Umsteller
Afbouwdelen voor thermostatische mengkraan met 2-weg stop-omstel





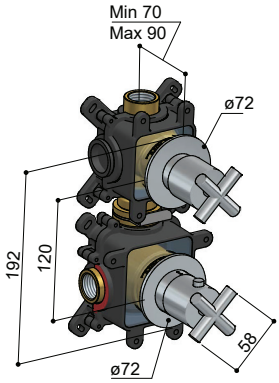

BEFORE STARTING / PRIMA DI INIZIARE / AVANT DE COMMENCER / ANTES DE EMPEZAR / VOR DEM START / VOORDAT JE BEGINT

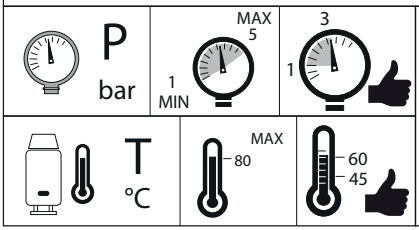


RECOMMENDED:
BALANCED PRESSURES




INSTALLATION

Once the mixer is installed in the wall, cut along the finished wall and remove the plastic protection




Put the silicone between the cover plate and the wall



TRIM FIXING


1. Fix the cover plate (1) on the threaded rod (2).
2. Screw the adapter (4) with their O-ring (3), until the plate (1) is against the wall.
3. Fix the handle body (5) and fix the screw (6).
4. Position the handle (7) on the handle body (5).
5. Screw the grub screw (8) with a 2 mm Allen key.
6. Fix the cover plate (9) on the chromed ring (10).
7. Fix the handle body (11) and fix the screw (12).
8. Position the handle (13) on the handle body (11).
9. Screw the grub screw (14) with a 2 mm Allen key.

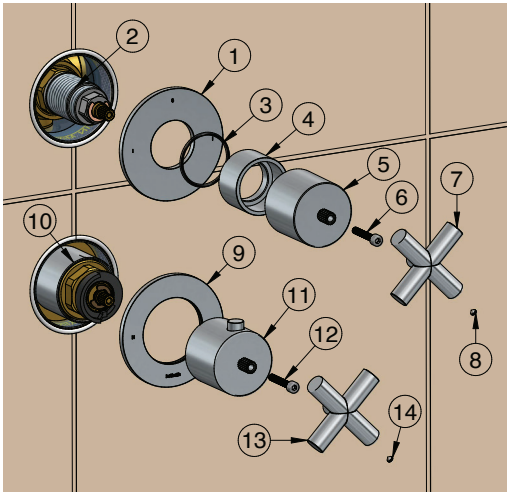

MAINTENANCE


REPLACEMENT OF THE DIVERTER CARTRIDGE

1. Close the water inlets
2. Remove the lever (2) and unscrew the grub screw (1) with 2 mm Allen key
3. Unscrew the screw (3) and remove the diverter handle (4)
4. Unscrew the chromed adapter (5), being careful not to lose the O-ring (6)
5. Remove the cover plate (7)
6. Unscrew the threaded rod (8)
7. Unscrew the flange (9) anti-clockwise, with a 17 wrench. Remove the diverting cartridge (10)
8. Before replacing the cartridge, clean thoroughly and grease the inner seat of the body
9. Replace the cartridge (9).
10. Screw the flange (8) and the threaded rod (7)
11. Reassemble the trim following the instructions of TRIM FIXING

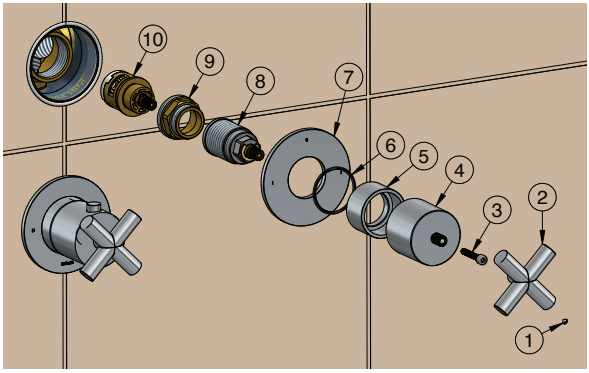


REMOVE AND CLEAN THERMOSTATIC CARTRIDGE


1. Remove the cup(1), Unscrew the grub screw (2) with an 2,5 mm Allen key
2. Remove the handle (3). Remove the plate (4).
3. Close the water inlets, in order to isolate the thermostatic cartridge.
4. Remove the stop ring(5).
5. Unscrew the thermostatic cartridge(6) anti-clockwise with a 30mm wrench.
6. Remove the thermostatic cartridge(6) and clean its filters under running water or leave to soak in vinegar in presence of limestone. Grease the O-rings and, if damaged, replace them with new ones. 2x OR 2175 mm 44,17 x 1,78 1x OR 2187 mm 47,35 x 1,78

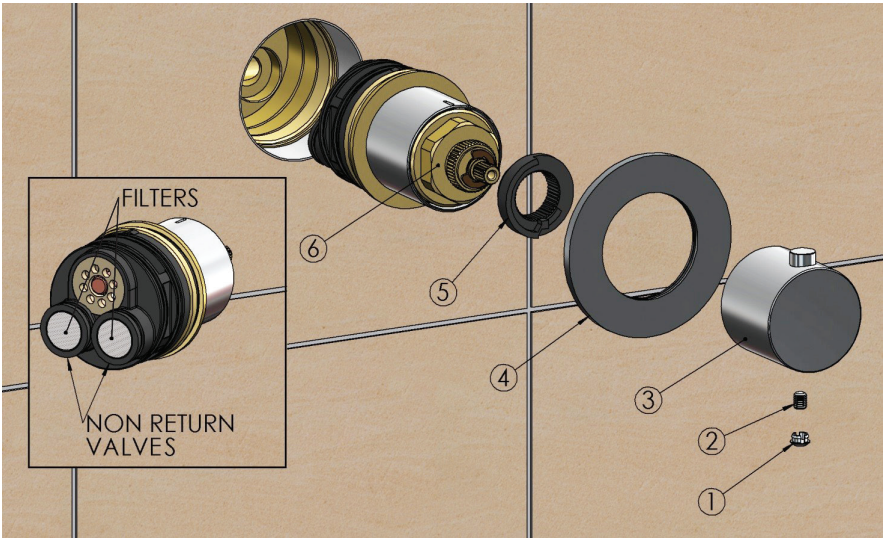

RE-INSTALL THE THERMOSTATIC CARTRIDGE


1. Check that the reference on the body cartridge is upward
2. Match the reference on the body of the thermostatic cartridge with the reference in the mixer body
3. Screw the thermostatic cartridge (6) clockwise with a 30mm wrench







POSITION OF THE STOP RING

1. Place the stop ring(5) as shown in the image below.
2. Using the handle, rotate the broached rod (A) to reach the set temperature of 38°C (check the temperature with a thermometer).



CLEANING - PULIZIA - NETTOYAGE - REINIGUNG - LIMPIEZA - REINIGING

	WARNING					
CR CHROME	Inoxidable electrolitic finish Finitura elettrolitica inossidabile Finition électrolytique inoxydable Inoxidierbare elektrolytische Ausführung Acabado electrolítico inoxidable Inoxidable elektrolitische afwerking					
BBP BRUSHED BRASS PVD	Inoxidable PVD finish Finitura PVD inossidabile Finition PVD inoxydable Inoxidierbare PVD Ausführung Acabado PVD inoxidable Inoxidable PVD afwerking					
PBP POLISHED BLACK PVD	Inoxidable PVD finish Finitura PVD inossidabile Finition PVD inoxydable Inoxidierbare PVD Ausführung Acabado PVD inoxidable Inoxidable PVD afwerking					

TERMS OF SALE AND WARRANTY
CONDIZIONI DI VENDITA E GARANZIA
CONDITIONS DE VENTE ET GARANTIE

CONDICIONES DE VENTA Y GARANTÍA
VERKAUFSBEDINGUNGEN UND GARANTIE
VERKOOP- EN GARANTIEVOORWAARDEN

NETHERLANDS
BELGIUM
LUXEMBOURG
UK AND IRELAND

https://www.hotbath.nl/garantie

Hotbath B.V.
Nieuwland Parc 210
2952 DC Alblasserdam
Nederland
E info@hotbath.nl
W hotbath.nl

ALL COUNTRIES
(EXCEPTED BENELUX, UK AND IRELAND)

https://hotbath.it/en/termsofsale

Hotbath Srl
Via Marco Polo 135/D
I-55049 Viareggio
Italy
E info@hotbath.it
W hotbath.it

hotbath
italian bathroomware